Xvision™

CCTV

Model: **XAM300M**
32 Visitor Memory Unit for the XAM300

Before you begin

- Please unpack the box carefully and identify that all the parts are present.
- Do not cut the cables, this will void the warranty.
- Make sure you use only the recommended power supply. Damage caused to the unit by incorrect voltage or wiring is not covered by the warranty.

Model:
XAM300M
32 Visitor Memory Unit for the XAM300

Thank you for purchasing this Xvision Visitor Memory Unit. Before operating this product, please read this instruction manual carefully.

1. Safety Precautions



CAUTION

RISK OF ELECTRIC SHOCK.
DO NOT OPEN!

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

2. Product Description

The XA300M is an excellent value 32 Visitor Memory Unit, designed for ease of use and maximum reliability. It is designed to be used with the XAM300 B/W Entry Phone/Monitor and features real time image recording and playback of images.

3. Features

Recording Function
Records Real Time images from the entry camera with time/date stamp. Up to 32 visitor images can be stored for later reviewing via the monitor on the XAM300 Phone/Monitor unit.

Time Display
The time & date is visible in the monitor on the XAM300 Phone/Monitor unit.

Auto Off Function
User may switch off the unit or set up Auto-Off after browsing stored images.

4. Controls

Please note the unit is designed for use with the XAM300 B/W Entry Phone/ Monitor and requires the use of its monitor for some settings and functions.

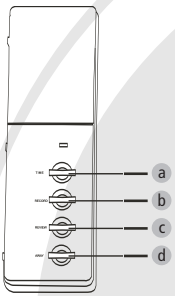

a. TIME button
To set the time/date on the unit. The time display will be shown on the XAM300 Phone/Monitor unit.

b. RECORD button
To manually activate the image recording mode to capture an instant snapshot of a visitor in real time.

c. REVIEW button
Image Playback function for browsing the stored images. Images will be displayed on the XAM300 Phone/Monitor unit.

d. AWAY button
To activate the auto-recording mode while you are away from the premises.

5. Operation

1. Press the **AWAY** button if you leave the premises, the LED will light. The system will now operate automatically and record each visitor image. When a visitor presses the button on the door entry camera, the bell will ring and the system will automatically turn to surveillance mode, recording a image of each visitor.

2. When you return, press the button to activate the display on the XAM300, then press the **REVIEW** button on the Visitor Memory unit to browse the images of visitors that called whilst you were away. You will see the most recent image first. Scroll through stored images by repeatedly pressing the **REVIEW** button. Once you have finished reviewing images the unit will return to the live screen. Stored images can be reviewed by pressing the **REVIEW** button at any time.

3. Press **RECORD** button to activate the image recording mode. Press once to store one picture of the camera view in real time, 32 images can stored at any one time. The system will auto-delete the oldest image first when the limit is reached.

4. To set up the date and time you will need to have the XAM300 Phone/Monitor connected to this unit. First press the **TIME** button and the MINUTE digits will flash in the screen. Press the **REVIEW** button to enter the required value. Press the **TIME** button again to set the HOUR value, again press the **REVIEW** button to enter the required value. Repeat this procedure for DAY, MONTH and YEAR (See diagram).

Note: The **RECORD** and **TIME** buttons are disabled in the browsing mode.

6. System & Wiring Diagrams

Option 1: Multi Apartment Entry Camera/Single Video Door Entry Phone Monitor/Single Visitor Memory Unit

System Diagram

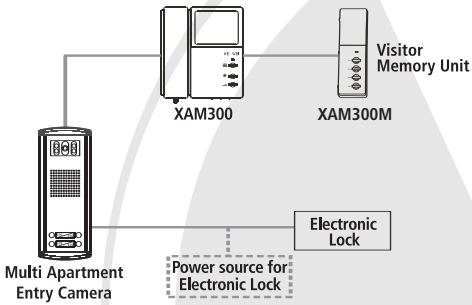

Wiring Diagram

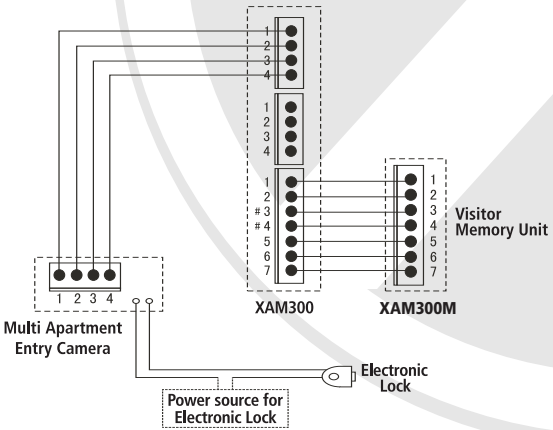

6. System & Wiring Diagrams (continued)

Option 2: Multi Apartment Entry Camera/Two Video Door Entry Phone Monitors/Single Visitor Memory Unit

System Diagram

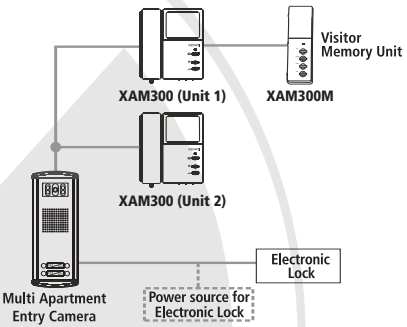

Wiring Diagram

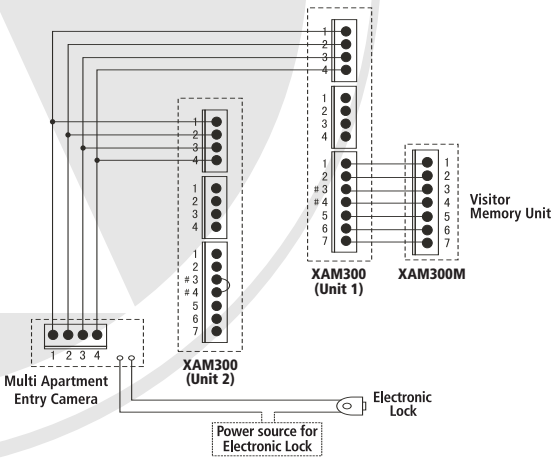

6. System & Wiring Diagrams (continued)

Option 3: Multi Apartment Entry Camera/Multiple Video Door Entry Phone Monitors/Visitor Memory Unit/Single Intercom Phone

System Diagram

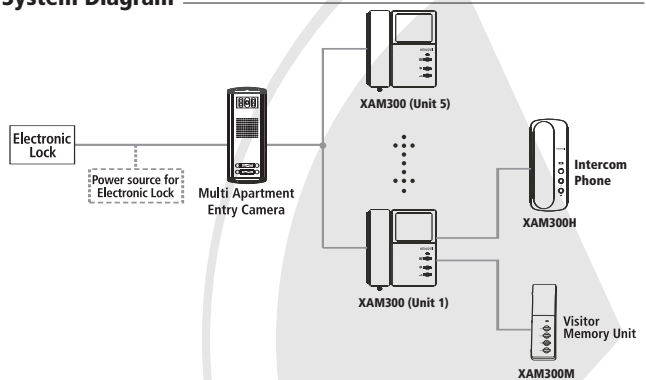

Wiring Diagram

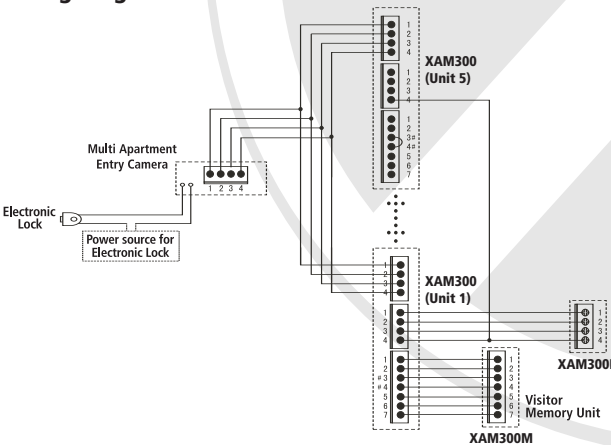

Xvision™
CCTV

TECHNICAL SUPPORT:

For Technical Support for any Xvision product please contact your local distributor.

LIMITED WARRANTY:

This product is supplied with a 1 Year warranty. The Warranty excludes products that have been misused, (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.

Manufactured exclusively for:
Xvision (Europe) Group,
Head Office: London, U.K.
Email: info@x-vision.co.uk
Web: www.x-vision.co.uk